


- ◆ RETE STIRATA E SPIANATA A MAGLIA TONDA
- ◆ ROUND MESH FLATTENED EXPANDED METAL
- ◆ METAL DEPLOYE ET APLATI A MAILLE RONDE
- ◆ STRECKMETALL FLACHGEWALZT MIT RUNDMASCHE
- ◆ METAL EXPANDIDO Y LAMINADO CON MALLA REDONDA

MTS 16 Ø 8 - 3 X 1,5

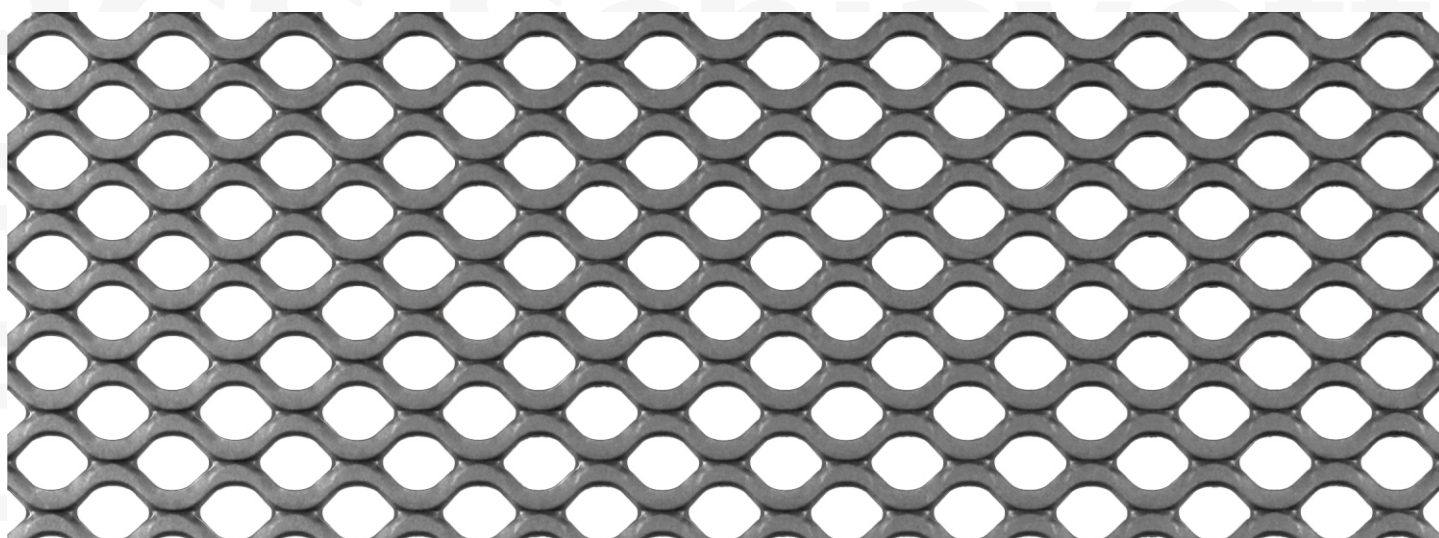

This image is for illustrative purposes only, it may not accurately represent real mesh

◆ **Materiale:** ACCIAIO DC 04
Interassi maglia: mm 16 x 13,3
Avanzamento: mm 3
Spessore: mm 1,5
Superficie di passaggio: 54% ~
Peso: KG/M² 5,4 + - 10%

◆ **Raw material:** MILD STEEL DC 04
Mesh pitch: mm 16 x 13,3
Strand width: mm 3
Thickness: mm 1,5
Open area: 54% ~
Weight: KG/M² 5,4 + - 10%

◆ **Matière:** ACIER DOUX DC 04
Entraxes: mm 16 x 13,3
Lanière: mm 3
Epaisseur: mm 1,5
Transparence frontale: 54% ~
Poids: KG/M² 5,4 + - 10%

◆ **Material:** STAHL DC 04
Achsabstände der Masche: mm 16 x 13,3
Stegbreite: mm 3
Dicke: mm 1,5
Freier Querschnitt: 54% ~
Gewicht: KG/M² 5,4 + - 10%

◆ **Material:** ACERO DC 04
Entreejes malla: mm 16 x 13,3
Ancho hilo: mm 3
Espesor chapa: mm 1,5
Transparencia frontal: 54% ~
Peso: KG/M² 5,4 + - 10%

- ◆ RETI E GRIGLIATI STIRATI
- ◆ EXPANDED METAL
- ◆ METAL DEPLOYE
- ◆ STRECKMETALL
- ◆ METAL EXPANDIDO



RGS Schiavetti Srl
 Viale della Vittoria, 4
 15060 STAZZANO (AL)
 Tel. **39 0143 61295
 Fax **39 0143 633466
 www.rgs.it rgs@rgs.it