


- ◆ RETE STIRATA E SPIANATA A MAGLIA TONDA
- ◆ ROUND MESH FLATTENED EXPANDED METAL
- ◆ METAL DEPLOYE ET APLATI A MAILLE RONDE
- ◆ STRECKMETALL FLACHGEWALZT MIT RUNDMASCHE
- ◆ METAL EXPANDIDO Y LAMINADO CON MALLA REDONDA

MTS 20 Ø 10 - 3,25 X 1,5

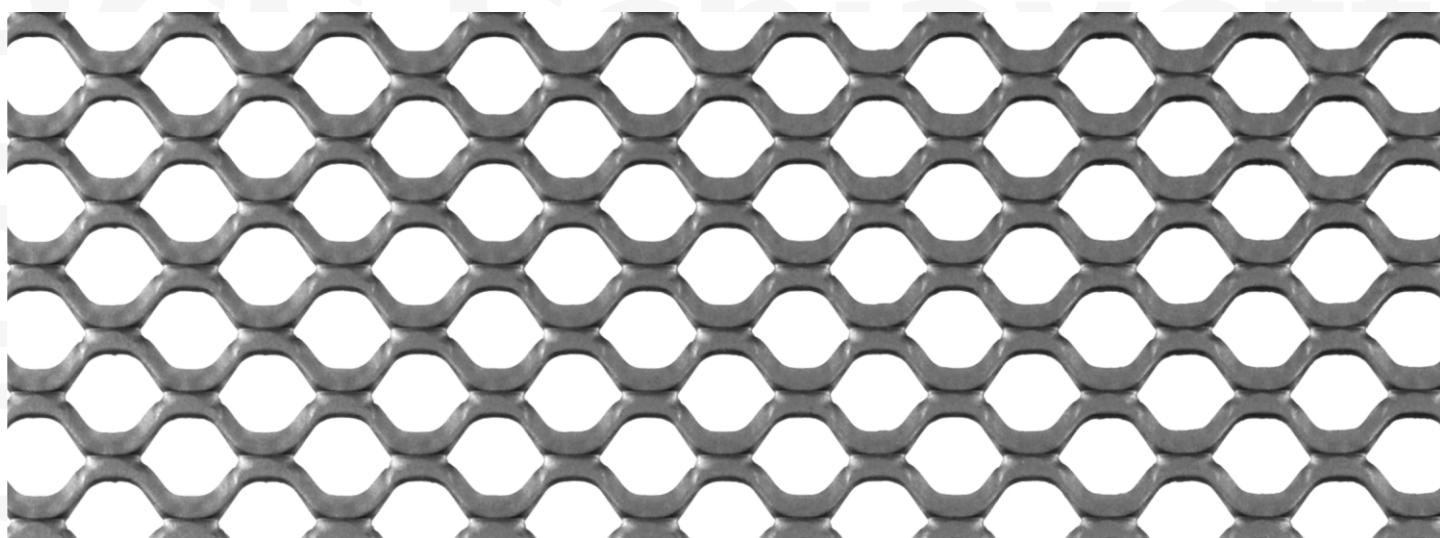

This image is for illustrative purposes only, it may not accurately represent real mesh

◆ **Materiale:** ACCIAIO DC 04
Interassi maglia: mm 20 x 16,5
Avanzamento: mm 3,25
Spessore: mm 1,5
Superficie di passaggio: 59% ~
Peso: KG/M² 4,8 + - 10%

◆ **Raw material:** MILD STEEL DC 04
Mesh pitch: mm 20 x 16,5
Strand width: mm 3,25
Thickness: mm 1,5
Open area: 59% ~
Weight: KG/M² 4,8 + - 10%

◆ **Matière:** ACIER DOUX DC 04
Entraxes: mm 20 x 16,5
Lanière: mm 3,25
Epaisseur: mm 1,5
Transparence frontale: 59% ~
Poids: KG/M² 4,8 + - 10%

◆ **Material:** STAHL DC 04
Achsabstände der Masche: mm 20 x 16,5
Stegbreite: mm 3,25
Dicke: mm 1,5
Freier Querschnitt: 59% ~
Gewicht: KG/M² 4,8 + - 10%

◆ **Material:** ACERO DC 04
Entreejes malla: mm 20 x 16,5
Ancho hilo: mm 3,25
Espesor chapa: mm 1,5
Transparencia frontal: 59% ~
Peso: KG/M² 4,8 + - 10%

- ◆ RETI E GRIGLIATI STIRATI
- ◆ EXPANDED METAL
- ◆ METAL DEPLOYE
- ◆ STRECKMETALL
- ◆ METAL EXPANDIDO



RGS Schiavetti Srl
 Viale della Vittoria, 4
 15060 STAZZANO (AL)
 Tel. **39 0143 61295
 Fax **39 0143 633466
 www.rgs.it rgs@rgs.it